

www.polsinelli.it



POLSINELLI



 *An Italian
quality brand*

**YOUR QUALITY EQUIPMENT,
YOUR QUALITY WINE!**



POLSINELLI





From 1958

Founded in 1958, Polsinelli company has born as manufacturer of presses and destemmers. The market evolution suggests an increase of produced items, extending the range also to stainless steel tanks and small machines for filtration and bottling. Since about 20 years, the company has specialized in project and production of small and medium-sized winery thanks to its wide range of enological products. Today the company with its experience is able to meet needs of companies involved in wine, oil and liqueurs in general production with the technical support of an high specialised staff. The company has a department for assistance and repair of enological tools and machines, also offering to its customers post-sales service for any company needs. We have an exhibition area dedicated to small tools for enology that allows winemaking hobbysts to create a mini-winery almost on a professional level. We are able to deliver our goods worldwide.



OUR PRODUCTS

AN ITALIAN QUALITY BRAND



HYDRAULIC AND MANUAL PRESSES

MANUAL PRESS

Screw in drawn steel. Steamed beech cage with removable pins.
Two-speed ratchet movement starting from 40. Stainless steel basin reinforced with handkerchiefs.

ITEM	DESCRIPTION	CAGE DIAMETER	SCREW DIAMETER	MARC CAPACITY	WEIGHT Kg
TOP0019	Ratchet presses 15	15x22 cm	15 mm	5 Lt	8
TOP0020	Ratchet presses 20	20x31 cm	20 mm	10 Lt	17
TOP0021	Ratchet presses 25	25x36 cm	20 mm	20 Lt	20
TOP0022	Ratchet presses 30	30x41 cm	30 mm	30 Lt	39
TOP0023	Ratchet presses 35	35x46 cm	30 mm	50 Lt	50
TOP0024	Ratchet presses 40	40x55 cm	40 mm	70 Lt	75
TOP0025	Ratchet presses 45	45x60 cm	45 mm	95 Lt	100
TOP0026	Ratchet presses 50	50x64 cm	50 mm	125 Lt	130
TOP0027	Ratchet presses 55	55x70 cm	55 mm	165 Lt	180
TOP0028	Ratchet presses 60	60x74 cm	60 mm	210 Lt	230
TOP0029	Ratchet presses 70	70x83 cm	70 mm	320 Lt	325

HYDRAULIC PRESS

Screw in drawn steel. Steamed beech cage with removable pins.
Two-speed ratchet movement starting from 40. Stainless steel basin reinforced with handkerchiefs.

Hydraulic jack working pressure 400 atm

ITEM	DESCRIPTION	CAGE DIAMETER	SCREW DIAMETER	MARC CAPACITY	WEIGHT Kg
TOP0031	Hydraulic press 50	50x64 cm	50 mm	125 Lt	165
TOP0032	Hydraulic press 55	55x70 cm	55 mm	165 Lt	205
TOP0033	Hydraulic press 60	60x74 cm	60 mm	210 Lt	280
TOP0034	Hydraulic press 70	70x83 cm	70 mm	320 Lt	390
TOP0035	Hydraulic press 80	80x95 cm	80 mm	475 Lt	530



MANUAL AND MOTORIZED CRUSHERS

Sturdy sheet metal frame. Epoxy powder coating for food contact.
They are also available in stainless steel.

ITEM	DESCRIPTION	HOPPER SIZE	MOTOR	DIMENSIONS	WEIGHT Kg
PDP0028	Grape crusher type B	78x50x31(h) cm	/	120x55x36(h) cm	19
PDP0023	Grape crusher type B inox	66x48x31(h) cm	/	120x55x36(h) cm	19
PDP0029	Grape crusher type B hopper inox	66x48x31(h) cm	/	120x55x36(h) cm	16
PDP0030	Grape crusher type C	85x62x33(h) cm	/	120x62x36(h) cm	20
PDP0024	Grape crusher type C inox	85x56x31(h) cm	/	120x55x36(h) cm	19
PDP0031	Grape crusher type C hopper inox	85x56x31(h) cm	/	120x55x36(h) cm	18
PDP0033	Grape crusher type D	85x62x33(h) cm	HP 0,5	120x62x48(h) cm	28

AN ITALIAN QUALITY BRAND

POLSINELLI
ENOLOGIA BREWING OLIVICULTURA


DESTEMMERS (Model without pump)

Sturdy sheet metal frame.

Hopper available with slide or with feeding screw.

The destemmer shaft-motor is mounted on sealed ball bearings.

Removable stainless steel grid. Epoxy powder coating for food contact.

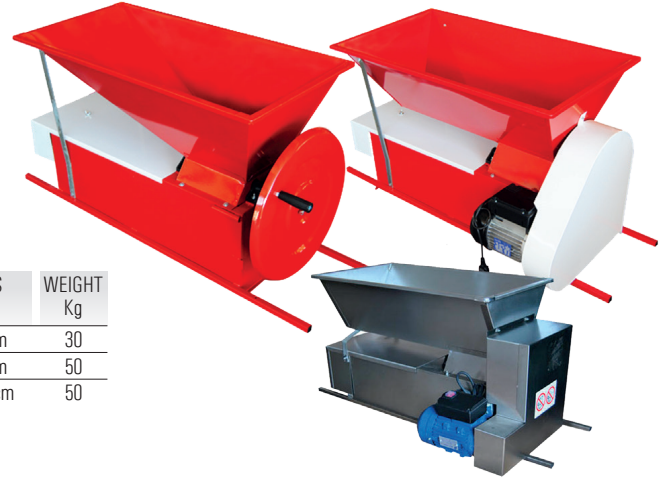

ITEM	DESCRIPTION	HOPPER SIZE	MOTOR	HOUR PRODUCTION Kg	DIMENSIONS	WEIGHT Kg
PDP0009	FIBRENO 10	50x97 cm	/	1000	68x60x130 cm	30
PDP0011	FIBRENO 20	52x95 cm	HP 1	2000	68x60x130 cm	50
PDP0015	FIBRENO 20 INOX	48x85 cm	HP 1	2000	65x62,5x120 cm	50

DESTEMMERS (Model with pump)

Sturdy sheet metal frame.

Hopper available with slide or with feeding screw.

The destemmer shaft-motor is mounted on sealed ball bearings.

Removable stainless steel grid. Epoxy powder coating for food contact.



ITEM	DESCRIPTION	HOPPER SIZE	MOTOR	HOUR PRODUCTION Kg	DIMENSIONS	WEIGHT Kg
PDP0012	FIBRENO 25	64x86 cm	HP 2	2500	85x72x112 cm	90
PDP0016	FIBRENO 25 INOX	64x86 cm	HP 2	2500	85x72x112 cm	90
PDP0013	FIBRENO 30	64x100 cm	HP 2	3000	85x72x127 cm	115
PDP0017	FIBRENO 30 INOX	64x100 cm	HP 2	3000	85x72x127 cm	115
PDP0018	FIBRENO 50	64x125 cm	HP 2,5	5000	100x80x170 cm	170
PDP0018	FIBRENO 50 INOX	64x125 cm	HP 2,5	5000	100x80x170 cm	170
PDP0004	GAMMA 50	30x100 cm	HP 1,8	5000	197x105x160 cm	200



ELECTRICAL PRESS

The machine is produced according to the most modern technical-construction criteria and with carefully selected materials. Built with a stainless steel revolving collection basin to easily load and extract the cage. Equipped with a single-phase electric motor. Hydraulic operation and supplied with oil. Pressure from top to bottom. Chrome-plated double-acting piston.

ITEM	DESCRIPTION	CAGE CAPACITY	CAGE SIZE	PISTON DIAMETER	TOTAL PRESSURE Kg	MOTOR	DIMENSIONS	WEIGHT Kg
PRP0002	ALFA 40	75 lt	52x95 cm	50 mm	9000	HP 0,5	68x60x130 cm	180
PRP0001	ALFA 40 INOX	75 lt	52x95 cm	50 mm	9000	HP 0,5	68x60x130 cm	180
PRP0004	ALFA 50	130 lt	50x65 cm	70 mm	13.500	HP 0,5	90x100x175 cm	230
PRP0003	ALFA 50 INOX	130 lt	50x65 cm	70 mm	13.500	HP 0,5	90x100x175 cm	230
PRP0006	ALFA 60	220 lt	60x75 cm	90 mm	22.300	HP 1	110x132x205 cm	400
PRP0005	ALFA 60 INOX	220 lt	60x75 cm	90 mm	22.300	HP 1	110x132x205 cm	400
PRP0029	ALFA 70	320 lt	70x85 cm	110 mm	33.300	HP 1	120x145x225 cm	570
PRP0034	ALFA 70 INOX	320 lt	70x85 cm	110 mm	33.300	HP 1	120x145x225 cm	570
PRP0031	ALFA 80	475 lt	80x95 cm	130 mm	46.500	HP 1	125x155x250 cm	900
PRP0007	ALFA 80 INOX	475 lt	80x95 cm	130 mm	46.500	HP 1	125x155x250 cm	900

MANUAL PRESS


The Beta vertical press is the ideal technological solution for wineries and producers looking for an effective machine for extraction of grape must and marc.

The hydraulic system allows to optimize working times and also extraction quality, making this model a professional machine for companies.

The vertical press Beta for wine is made of a loading collection basin, a stainless steel pressing plate and a pressure gauge to control the pressure.

Its operation is manual and its mechanism is controlled through two levers placed on the frame side. The cage has a revolving collection basin, designed to facilitate load and extracting operation. The piston exerts pressure from the top to the bottom. The press is supplied by Polsinelli Enologia included with oil.

ITEM	DESCRIPTION	CAGE CAPACITY	CAGE SIZE	PISTON DIAMETER	TOTAL PRESSURE Kg	DIMENSIONS	WEIGHT Kg
PRP0043	BETA 30	30 lt	30 x 45 cm	60/72 mm	6000	55x50x120 cm	81
PRP0044	BETA 40	75 lt	40 x 55 cm	60/72 mm	8000	68x60x130 cm	127
PRP0004	BETA 50	130 lt	50 x 65 cm	75/90 mm	12000	90x100x175 cm	280
PRP0003	BETA 60	220 lt	60 x 75 cm	90/105 mm	20000	110x132x205 cm	380

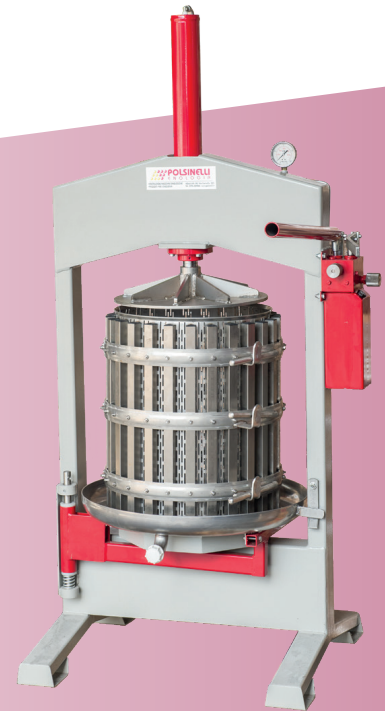

AN ITALIAN QUALITY BRAND

POLSINELLI
ENOLOGIA BREWING OLIVICOLTURA

FLAT BOTTOM STAINLESS STEEL TANK WITH OIL FLOATING LID

Ideal to storage wine and food liquids. Produced in stainless steel with flowered external finish. The bottom of the tank is rounded and welded for easy cleaning. It is equipped with stainless steel oil floating lid and a threaded stainless steel bush suitable to chrome plated tap, or stainless steel or plastic material for food taps. The floating lid is placed on the liquid, then inside the tank, on the surface still in contact with open air, it must be poured vaseline oil between the edge of float and the internal surface of the tank. The vaseline oil is odorless, tasteless and for food contact; it is lighter than wine and remains afloat avoiding that air comes in contact with the liquid.

ITEM	DESCRIPTION	INNER DIAMETER	HEIGHT	WALL THICKNESS	BOTTOM THICKNESS	BUSHING DIAMETER
SIP0315	35 Lt	370 mm	385 mm	0,6 mm	0,6 mm	1/2
SIP0215	50 Lt	370 mm	495 mm	0,6 mm	0,6 mm	1/2
SIP0219	75 Lt	370 mm	745 mm	0,6 mm	0,6 mm	1/2
SIP0210	100 Lt	455 mm	680 mm	0,6 mm	0,6 mm	1/2
SIP0211	150 Lt	530 mm	705 mm	0,6 mm	0,7 mm	1/2
SIP0212	200 Lt	530 mm	980 mm	0,6 mm	0,7 mm	1/2
SIP0213	300 Lt	630 mm	990 mm	0,6 mm	0,7 mm	3/4
SIP0214	400 Lt	710 mm	1045 mm	0,6 mm	0,7 mm	3/4
SIP0216	500 Lt	780 mm	1100 mm	0,6 mm	0,8 mm	3/4
SIP0217	600 Lt	780 mm	1240 mm	0,6 mm	0,8 mm	3/4
SIP0218	700 Lt	850 mm	1240 mm	0,6 mm	0,8 mm	3/4
SIP0221	1000 Lt	1025 mm	1240 mm	0,6 mm	0,8 mm	3/4



FLAT BOTTOM STAINLESS STEEL TANK WITH AIR FLOATING LID

Ideal to storage wine and food liquids. Produced in stainless steel with flowered external finish. The bottom of the tank is rounded and welded for easy cleaning. It is equipped with stainless steel oil floating lid and a threaded stainless steel bush suitable to chrome plated tap, or stainless steel or plastic material for food taps; it is also included the stainless steel pump with analogue pressure gauge, stainless steel floating lid, vent valve, recovery rope.

ITEM	DESCRIPTION	INNER DIAMETER	HEIGHT	WALL THICKNESS	BOTTOM THICKNESS	BUSHING DIAMETER
SIP0298	35 Lt	370 mm	385 mm	0,6 mm	0,6 mm	1/2
SIP0202	50 Lt	370 mm	495 mm	0,6 mm	0,6 mm	1/2
SIP0206	75 Lt	370 mm	745 mm	0,6 mm	0,6 mm	1/2
SIP0197	100 Lt	455 mm	680 mm	0,6 mm	0,6 mm	1/2
SIP0198	150 Lt	530 mm	705 mm	0,6 mm	0,7 mm	1/2
SIP0199	200 Lt	530 mm	980 mm	0,6 mm	0,7 mm	1/2
SIP0200	300 Lt	630 mm	990 mm	0,6 mm	0,7 mm	3/4
SIP0201	400 Lt	710 mm	1045 mm	0,6 mm	0,7 mm	3/4
SIP0203	500 Lt	780 mm	1100 mm	0,6 mm	0,8 mm	3/4
SIP0204	600 Lt	780 mm	1240 mm	0,6 mm	0,8 mm	3/4
SIP0205	700 Lt	850 mm	1240 mm	0,6 mm	0,8 mm	3/4
SIP0208	1000 Lt	1025 mm	1240 mm	0,6 mm	0,8 mm	3/4
SIP0319	1000 Lt with manhole	1025 mm	1240 mm	0,6 mm	0,8 mm	Manhole 300 mm



CONICAL BOTTOM STAINLESS STEEL TANK AISI 304 18/10

The stainless steel conical bottom tank is an interesting item suitable to storage and fermentation of enological products, but also of beer and other food liquids. The stainless steel is a fundamental element for conservation, thanks to its inalterability properties with a very high temperature range of use and with excellent resistance to acids and chlorides such as salt.

The reinforced bottom is on its own equipped with a slope of 10 ° and thanks to the stainless steel 1 "ENO 30 final valve and to the stainless steel valve 1" ENO 30 (with plastic curve ENO 30 D14) partial discharge offers both possibilities of partial and total discharge.

Internal finishes: mirror polished for easy cleaning and sanitization

External finishes: flowish with satin welding.

AIR FLOATING LID

ITEM	DESCRIPTION	INNER DIAMETER	HEIGHT	WALL THICKNESS	BOTTOM THICKNESS
SIP0055	300 Lt	640 mm	1400 mm	1 mm	1,2 mm
SIP0259	400 Lt	720 mm	1400 mm	1 mm	1,2 mm
SIP0097	500 Lt	720 mm	1650 mm	1 mm	1,2 mm
SIP0101	1000 Lt	930 mm	1900 mm	1 mm	1,5 mm
SIP0106	1500 Lt	1150 mm	2200 mm	1,2 mm	1,5 mm

AIR FLOATING LID WITH DOOR

ITEM	DESCRIPTION	INNER DIAMETER	HEIGHT	WALL THICKNESS	BOTTOM THICKNESS	MANHOLE
SIP0102	1000 Lt	930 mm	1900 mm	1 mm	1,5 mm	300 mm
SIP0107	1500 Lt	1150 mm	2200 mm	1,2 mm	1,5 mm	300 mm
SIP0113	2000 Lt	1150 mm	2800 mm	1,2 mm	1,5 mm	300 mm
SIP0118	2500 Lt	1270 mm	2800 mm	1,2 mm	2 mm	400 mm
SIP0121	3000 Lt	1400 mm	2800 mm	1,2 mm	2 mm	400 mm
SIP0122	3000 LT	1400 mm	2800 mm	1,2 mm	2 mm	400 mm

STORAGE TANKS

ITEM	DESCRIPTION	INNER DIAMETER	HEIGHT	WALL THICKNESS	BOTTOM THICKNESS	MANHOLE
SIP0074	500 Lt	720 mm	1950 mm	1 mm	1,2 mm	/
SIP0077	500 Lt	720 mm	1950 mm	1 mm	1,2 mm	300 mm
SIP0083	1000 Lt	930 mm	2200 mm	1 mm	1,5 mm	/
SIP0086	1000 Lt	930 mm	1950 mm	1 mm	1,2 mm	300 mm
SIP0262	1500 Lt	1150 mm	2200 mm	1,2 mm	1,5 mm	400 mm

REFRIGERATED

ITEM	DESCRIPTION	INNER DIAMETER	HEIGHT	WALL THICKNESS	BOTTOM THICKNESS	MANHOLE
SIP0258	1500 Lt	1150 mm	2200 mm	1,2 mm	1,5 mm	300 mm
SIP0068	2000 Lt	1150 mm	2900 mm	1,2 mm	1,5 mm	400 mm
SIP0264	3600 Lt	1600 mm	2600 mm	1,2 mm	2 mm	310x420 mm



AN ITALIAN QUALITY BRAND

POLSINELLI
ENOLOGIA BREWING OLIVICOLTURA

ELECTRICAL PUMPS FOR POURING

Polsinelli selected a wide range of electrical pumps for pouring, exclusively produced in Italy and CE certified, to meet private customers and companies needs. The electrical pumps are self-priming and bidirectional, suitable to food liquid transfer.

The suction system allows the pump to work very well even in case of discontinuity liquid flow, which can be decanted in both directions, and therefore precisely dosed.

BE-M ELECTRICAL PUMPS

ITEM	DESCRIPTION	MOTOR	HOSEBARB DIAMETER	FLOW L/min	RPM G/min	MAX °C TEMP.	WEIGHT Kg
EPP0082	BE-M 20	0,5 HP	20	24	2800	35	5
EPP0083	BE-M 25	0,6 HP	25	45	1450	35	6
EPP0085	BE-M 30	1.0 HP	30	85	1450	35	10
EPP0087	BE-M 40	1.2 HP	40	102	1450	35	11
EPP0088	BE-M 50	3.0 HP	50	250	1450	35	22

NOVAX ELECTRICAL PUMPS

ITEM	DESCRIPTION	MOTOR	HOSEBARB DIAMETER	FLOW L/min	RPM G/min	MAX °C TEMP.	WEIGHT Kg
EPP0065	NOVAX 20 M	0,5 HP	20	28	2850	35	5
EPP0069	NOVAX 25 M	0,6 HP	25	45	1450	35	6
EPP0071	NOVAX 30 M	1.0 HP	30	85	1450	35	10
EPP0073	NOVAX 40 M	1.2 HP	40	110	1450	35	11

FLEXIBLE IMPELLER PUMP

ITEM	DESCRIPTION	MOTOR	HOSEBARB DIAMETER	FLOW L/min	RPM G/min	MAX °C TEMP.	WEIGHT Kg
EPP0027	EP MIDEX 30	0,75 HP	30	64	900	35	15
EPP0031	EP MINI 20	0,5 HP	20	17	900	35	9
EPP0036	EP MINOR 40	2.0 HP	40	115	900	35	20
EPP0045	GR MAJOR 60	1.5 HP	60	200	470	35	36



ENOITALIA ELECTRICAL PUMPS

ITEM	DESCRIPTION	MOTOR	HOSEBARB DIAMETER	FLOW L/min	RPM G/min	MAX °C TEMP.	WEIGHT Kg
EPP0092	ENOS 20	0,5 HP	20	28	2800	35	4,8
EPP0093	ENOS 25	0,6 HP	25	42	2520	35	7

FOOD CONTACT HOSES

These hoses are ideal for food liquids pouring, as they are designed and CE certified to prevent contaminating of inside flowing liquids, as they have contact surface that does not release any type of toxic substance or any element that could compromise liquid organoleptic features.


Some models have an internal stainless steel spiral to improve resistance, in other cases they have a screening to better withstand the liquid pressure. They are available in various sizes to fit most common hosebarb.

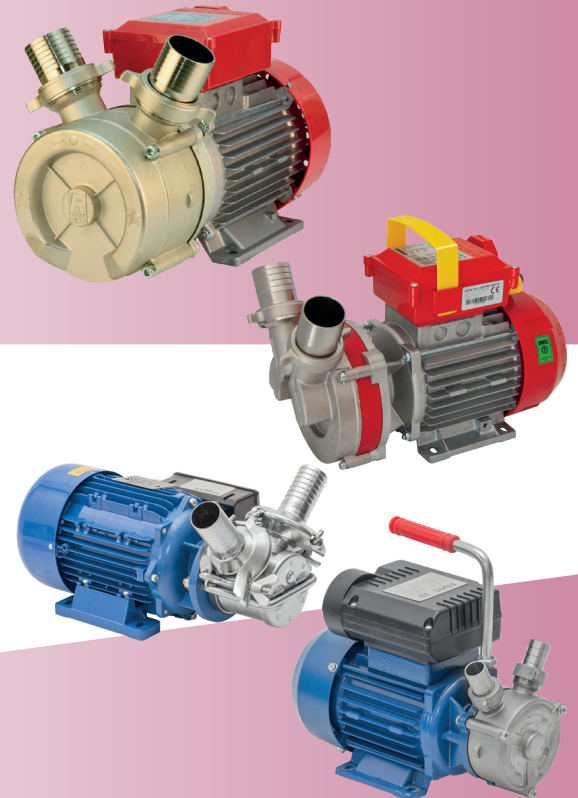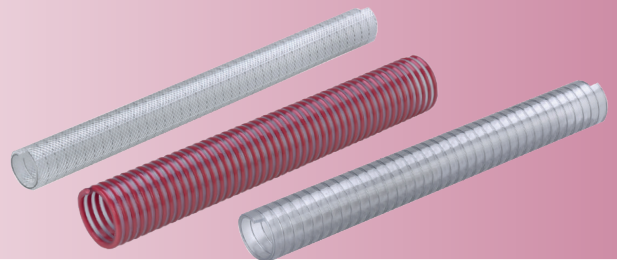

FILTERS

Our machineries are suitable to wine filtration, leaving its organoleptic properties as they are and therefore conform to wine production. The Baby series paper sheets filters are used to have final product with any residues in the bottle, while the Jolly and Eur series are made of stainless steel and according to the paper sheets filter, they guarantee excellent clarification with elimination of turbidity and residues. The professional filters Housing series are made of stainless steel and have an internal cartridge which allows different operations, from cleaning to cold wine sterilization.

ITEM	DESCRIPTION	FILTER TYPE	HOSEBARB	FLOW L/hour	FILTERING SURFACE	DIMENSIONS	WEIGHT Kg
MFP0025	BABY 6	SHEETS 20x20	20 mm	250	0,24 mq	360x300x280 (h) mm	17
MFP0022	BABY 12	SHEETS 20x20	20 mm	500	0,48 mq	460x300x280 (h) mm	18
MFP0023	BABY 18	SHEETS 20x20	25 mm	750	0,72 mq	510x300x280 (h) mm	20
MFP0045	JOLLY 20	SHEETS 20x20	20 mm	1000	0,8 mq	620x420x560 (h) mm	40
MFP0048	JOLLY 40	SHEETS 20x20	20 mm	1900	1,6 mq	940x480x590 (h) mm	52
MFP0030	EUR 20	SHEETS 20x20	25 mm	2000	3,2 mq	250x380x1550 (h) mm	250
MFP0041	HOUSING 1 CARTRIDGE	30" CODE CONNECTION 7	28 mm	1000	/	50x50x1100 (h) mm	16
MFP0042	HOUSING 3 CARTRIDGES	30" CODE CONNECTION 7	40 mm	3000	/	60x60x1100 (h) mm	20

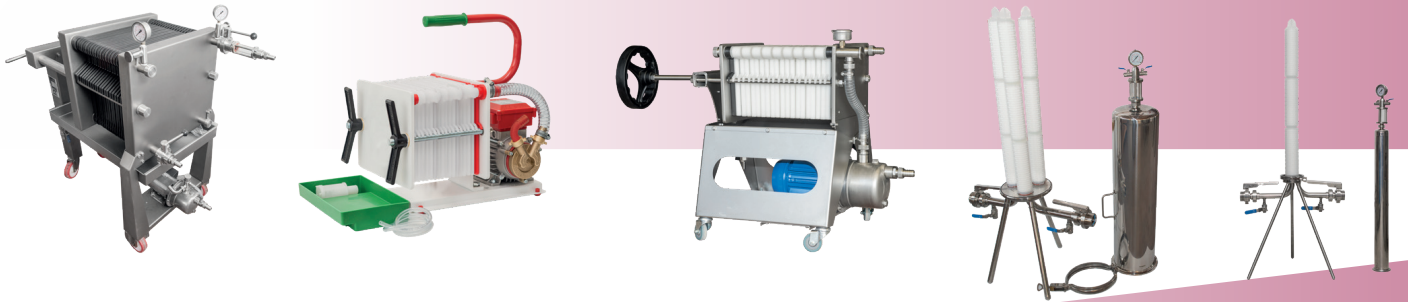

PRESSES

Our presses are suitable to press grapes, aubergines, herbs, tomatoes, etc. They have a solid structure made of sheet metal coated with epoxy paint or in polished die-cast aluminum both for food contact and with stainless steel basket and collector. Quick step screw pressing system.

ITEM	DESCRIPTION	COLLECTOR DIAMETER	CAPACITY Kg	DIMENSIONS
MLP0015	SMALL RED PRESS	13	4,2	230x320 mm
MLP0016	MEDIUM RED PRESS	16	5	265x320 mm
MLP0017	BIG RED PRESS	22	9	285x320 mm
MLP0004	ALU20 PRESS	14	4,3	270x380 mm
MLP0005	ALU25 PRESS	20	6,2	340x440 mm



AN ITALIAN QUALITY BRAND

POLSINELLI
ENOLOGIA BREWING OLIVICOLTURA

FILLERS

Our fillers provide practical support for wine bottling operations.

These are very high quality instruments, produced in Italy with structures resistant to humidity and corrosion.

The stainless steel series with 3 or 5 siphons guarantees long life over time. The Enolmatic, together with the bigger machine Enolmaster inox with 4 spouts, represent the maximum technological expression, as they aspire product to be bottled by depression, guaranteeing its integrity.

The Cad and Comby series fillers fully meet the user needs thanks to their high filling speeds and reliability.


ITEM	DESCRIPTION	BOTTLE HOUR PRODUCTION	HOSE DIAMETER	BOTTLE NECK DIAMETER MIN/MAX	HEIGHT MAX BOTTIGLIA	DIMENSIONS
RMP0039	3 HEADS INOX	200	16 mm	16/28 mm	360 mm	380x450x540 (h) mm
RMP0040	5 HEADS INOX	300	16 mm	16/28 mm	360 mm	415x660x540 (h) mm
RMP0033	ENOLMATIC	250	10 mm	16/28 mm	330 mm	200x400x400 (h) mm
RMP0032	ENOLMASTER	600	25 mm	16/28 mm	350 mm	650x460x450 (h) mm
RMP0022	CAD 4	640	18 mm	16/28 mm	360 mm	500x600x1700 (h) mm
RMP0026	COMBY 6	800	18 mm	16/28 mm	360 mm	1200x660x1700 (h) mm
RMP0037	FAST 4	550	18 mm	16/28 mm	360 mm	50x50x1100 (h) mm
IPP0228	PRO 6	900	20 mm	22/28 mm	440 mm	2545x1006x2300 (h) mm

LABELLING MACHINE

Professional and industrial labelling machines provide an exceptional support to complete easily and in the best way bottling of your food product. Ideal for companies but also for those who are active in amateur wine production and more, these tools are the ideal option to offer your customers well-finished and high-quality bottles, ready to be sold and distributed on the market.

ITEM	DESCRIPTION	BOTTLE DIAMETER MIN/MAX	BOTTLE HOUR PRODUCTION	SUPPLY KW	DIMENSIONS	WEIGHT Kg
IPP0068	ETI 05	45/120	500	/	575x500x360 (h) mm	18
IPP0071	ETI 06	50/115	500	/	500x500x300 (h) mm	18
IPP0066	ETI 10	45/120	700	0,2	550x400x500 (h) mm	40
IPP0287	ETI PRO	45/120	1200	1	2250x1100x1650 (h) mm	300
IPP0075	ETI PRO PVC	45/120	1200	1	2240x1100x1700 (h) mm	300
IPP0277	LOT STAMPER FOR LABELING ETI 05/06					



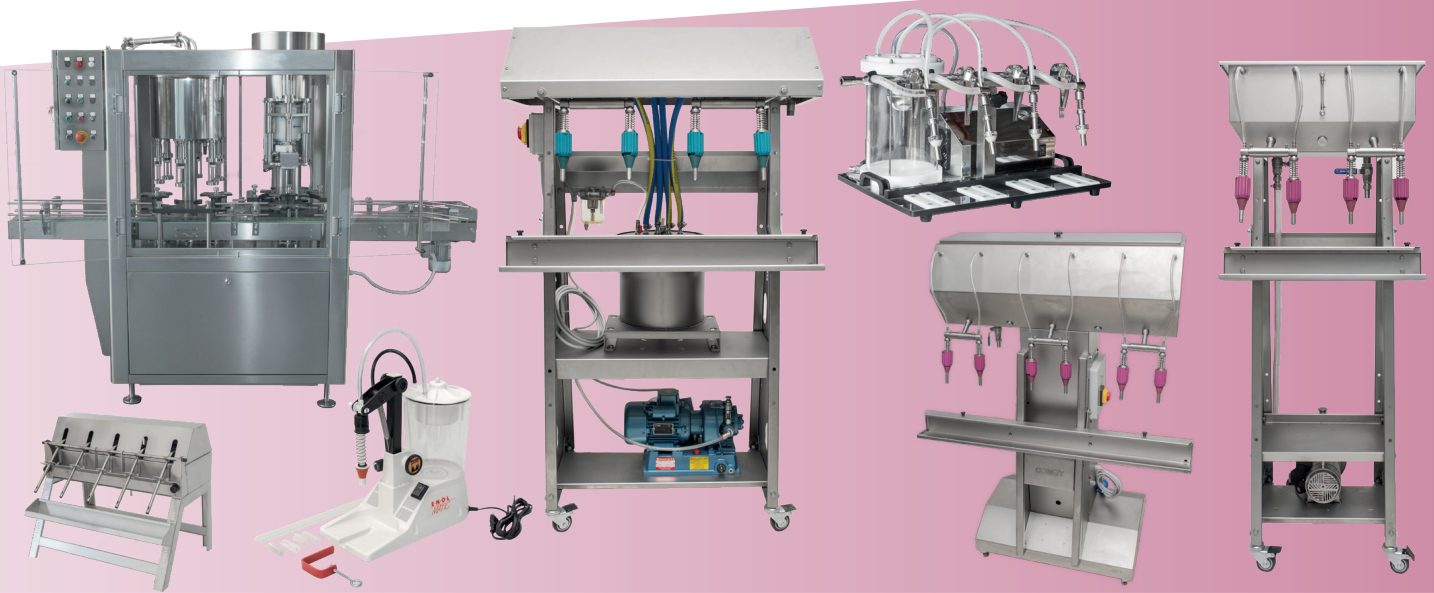

CAPPING MACHINES

Manual and semiautomatic column capping machines for cork and crown caps, agglomerated and synthetic caps, these machines are selected to meet all needs. Starting from the basic manual series Eco, moving to Mirko series pneumatic and electrical machines up to the professional P450 capping machines.

ITEM	DESCRIPTION	FUNCTIONING	MAX BOTTLE HEIGHT	CAPS	DIMENSIONS	WEIGHT Kg
ACP0177	ECO	MANUAL	360 mm	26-29	160X200X500 (h) mm	9
IPP0272	CIRCE	MANUAL	360 mm	26-29	220x170x510 (h) mm	10
IPP0273	ULISSE	MANUAL	360 mm	26-29	220x170x510 (h) mm	15
IPP0258	MIRKO ELECTRIC	POWER	460 mm	26-29	270x200x660 (h) mm	16
IPP0264	MIRKO PNEUMATIC	COMPRESSED AIR	460 mm	26-29	280x200x650 (h) mm	19
IPP0262	TOP CORK STOPPERS	MANUAL	360 mm	TF68	650X470X910 (h) mm	10
IPP0266	STARCAP	COMPRESSED AIR	465 mm	24-29	370x330x750 (h) mm	20
IPP0271	P450	POWER	390 mm	22-28	520x600x1830 (h) mm	110



AN ITALIAN QUALITY BRAND

See our website for other equipments www.polsinelli.it


POLSINELLI
 ENOLOGIA · BREWING · OLIVICOLTURA

SEALERS

Polsinelli selected the best sealers for every need. From home to professional use, manual and automatic machines.

Starting from the hand capper up to the semi-automatic Capsy 40.


ITEM	DESCRIPTION	CAPSULES	SUPPLY	BOTTLE HOUR PRODUCTION
IPP0025	HAND CAPSULE SEALER	PVC HEAT-SHRINK	220 V	/
IPP0026	BLOW-DRYING CAPSULE SEALER	PVC HEAT-SHRINK	220 V	/
IPP0027	STAINLESS STEEL CAPSULE SEALER	PVC HEAT-SHRINK	220 V	/
IPP0028	ENAMELLED CAPSULE SEALER	PVC HEAT-SHRINK	220 V	/
IPP0024	AIR CAPPING MACHINE SPARKLING CAPSULES	POLYLAMINATE CAPSULE	COMPRESSED AIR	500

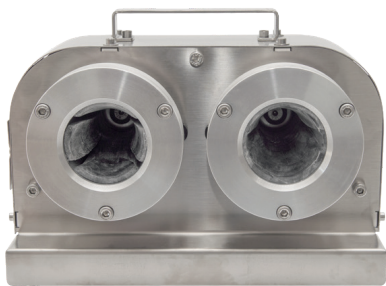


CHEMICAL GLASSWARET

In order to have the best enological productions, you will need tools that can offer precise measurements and controls such as the wine chemical glassware. For each production phase, after the squeezing by destemmers, it is necessary to control every steps through the wine chemical glassware wine in order to guarantee the perfect yield of the product and to maintain a correct temperature degree.

ITEM	DESCRIPTION
VCP0043	REFRACTOMETER 3 SCALES ATC
VCP0086	WINE METER
VCP0029	MUST METER BABO
VCP0028	MUST METER BABO WITH THERMOMETER
VCP0022	MUST METER
VCP0009	ALCOHOLMETER
VCP0008	LONG ALCOHOLMETER
VCP0007	LONG ALCOHOLMETER WITH THERMOMETER
VCP0081	WINE THERMOMETER
VCP0026	MUST METER GUYOT
VCP0025	MUST METER GUYOT WITH THERMOMETER
VCP0003	APHROMETER
VCP0060	DIGITAL THERMO-HYGROMETER

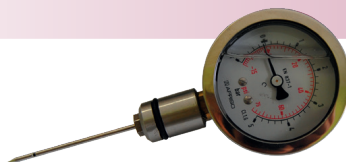

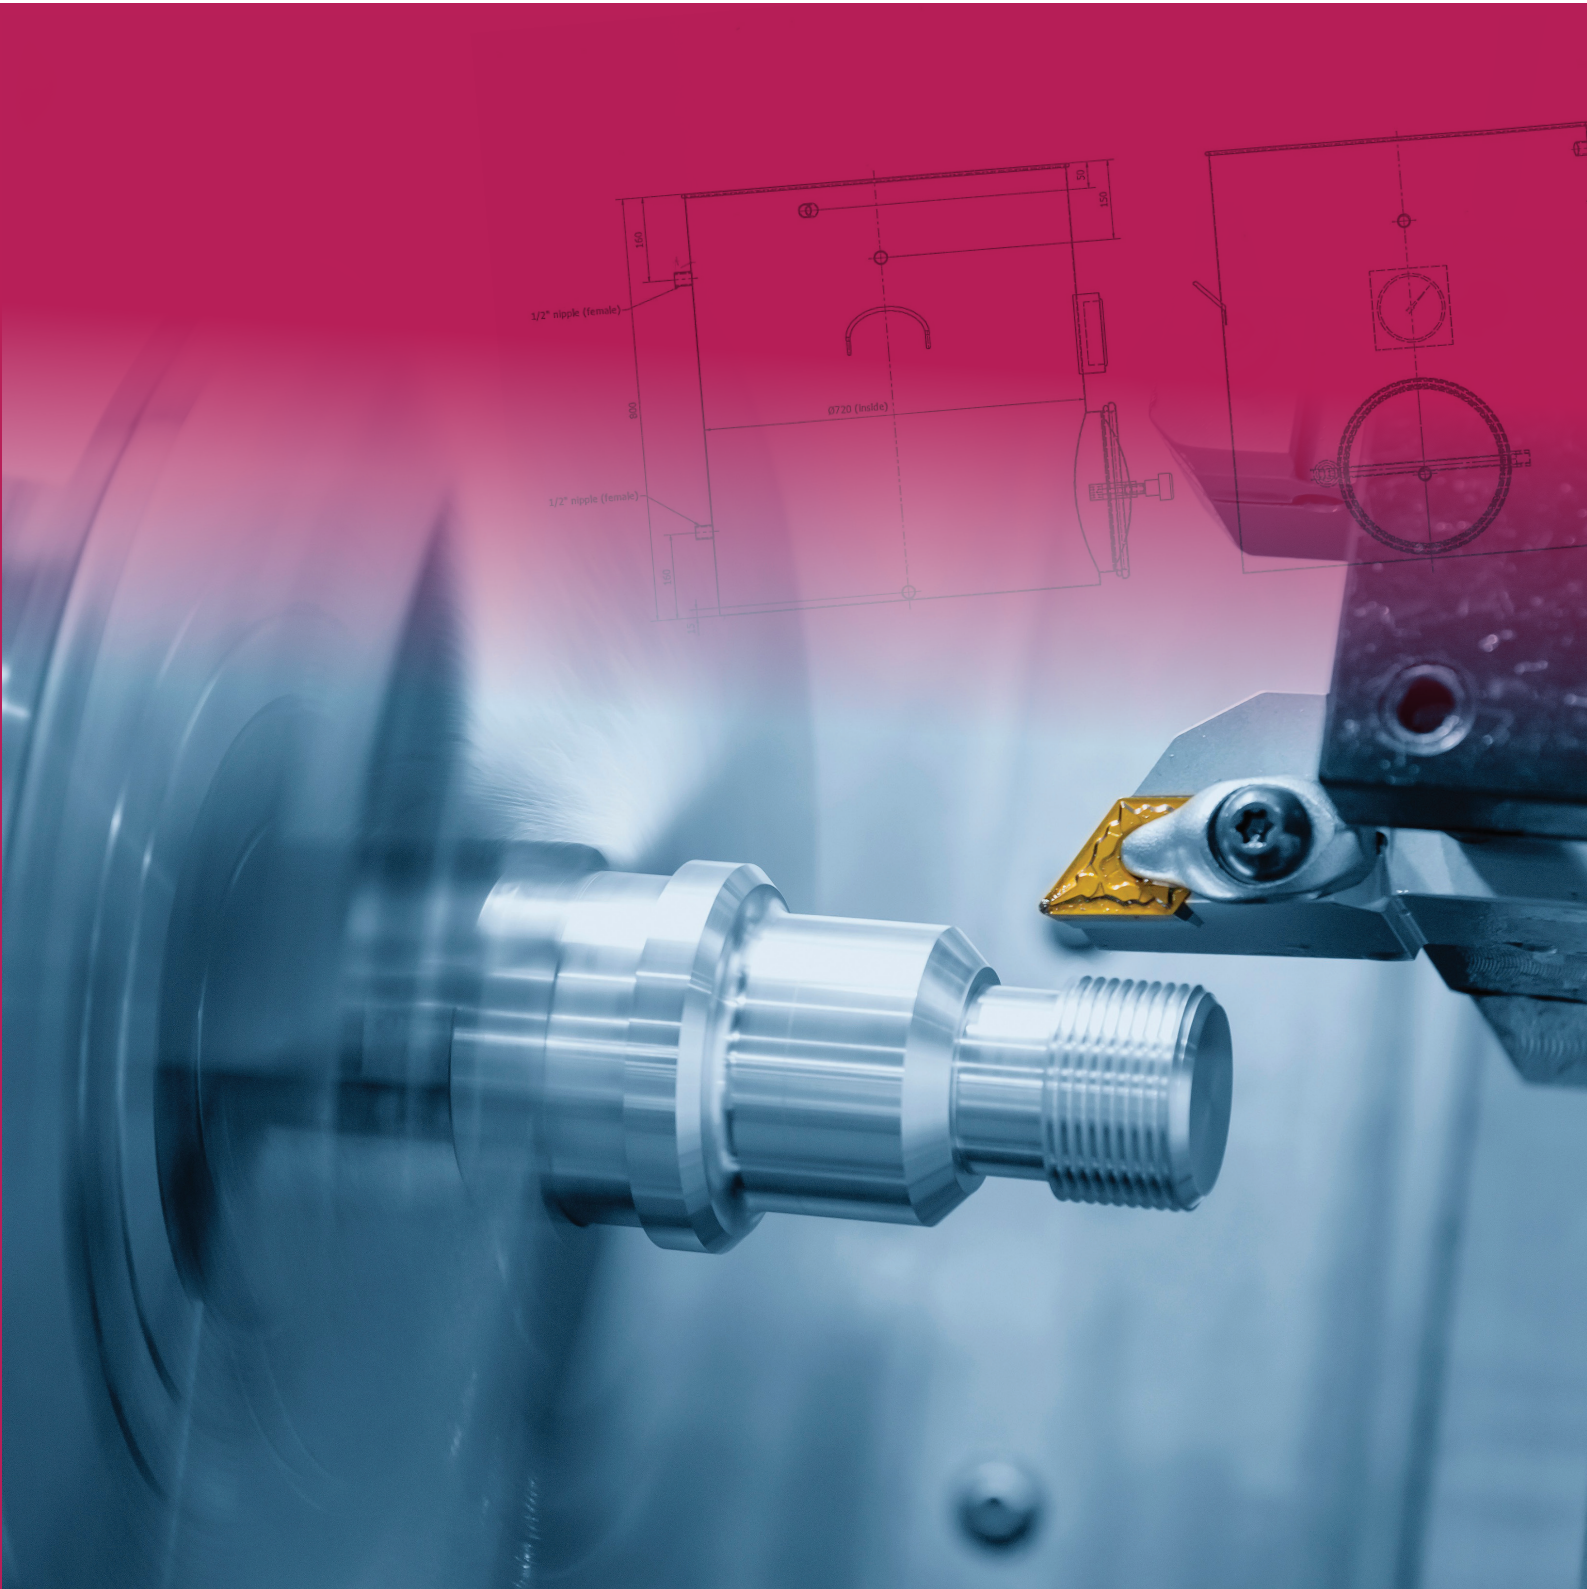

POLSINELLI

ENOLOGIA BREWING OLIVICOLTURA 

POLSINELLI ENOLOGIA Srl
03036 ISOLA DEL LIRI (FR) - ITALY

Via Carnello, 323

Tel. +39 0776 869068

Fax +39 0776 866128

info@polsinelli.it

